



DRS™ Laser

- **Add versatility to your video measurement system –** DRS lasers are available for most OGP® SmartScope® floor model and 250 benchtop systems
- **Choose from five models –** Five DRS lasers are available, with unique capture ranges, standoff distances, and resolutions
- **Measure the data you need –** Gather point, linear or area surface profile measurements
- **Automatic deployment –** Most DRS lasers are available with automatic deployment mechanisms, so the laser can be used when needed and retracted out of the way at other times
- **Surface tracking –** DRS lasers will dynamically adjust the Z-axis to track part contours
- **Measure parts of any color –** New blue DRS laser can measure white or transparent parts

## Dynamic Range Sensor Laser for Height and Surface Profile Measurements

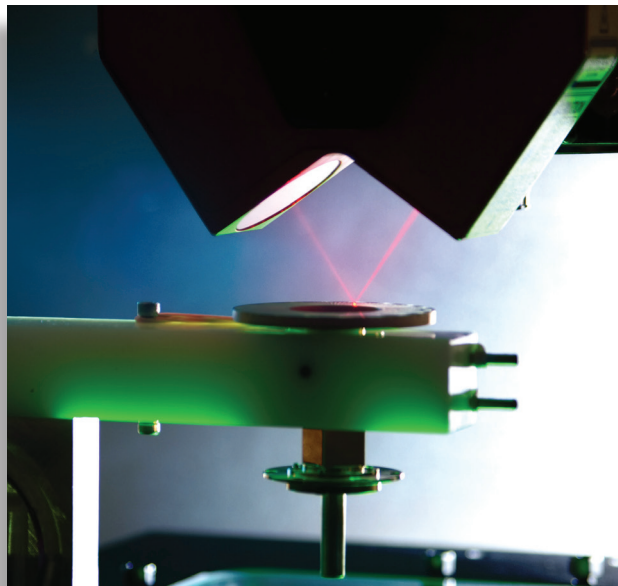

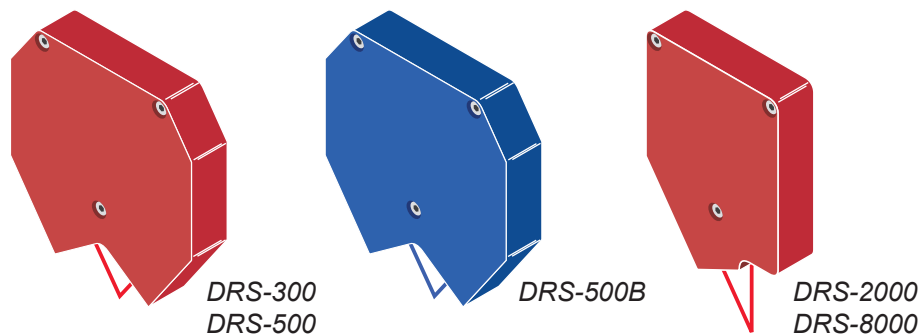

<b>Available for</b>	Most OGP® SmartScope® Vantage, ZIP, ZIP Lite, ZIP Advance, ATS, and Apex Micro dimensional measurement systems, and CNC 250 systems				
<b>Sensor</b>	<b>DRS-300</b>	<b>DRS-500</b>	<b>DRS-500B (Blue Laser)</b>	<b>DRS-2000</b>	<b>DRS-8000</b>
<b>Wavelength</b>	670 nm	670 nm	420 nm	670 nm	670 nm
<b>Type of Surface</b>	Any	Any	Any surface; best for transparent or white parts	Diffuse only	Diffuse only
<b>Capture range<sup>1</sup></b>	300 µm	500 µm	500 µm	2000 µm	8000 µm
<b>Z accuracy within capture range<sup>2</sup></b>	1.0 µm	1.0 µm	1.0 µm	10.0 µm	40.0 µm
<b>Dynamic resolution</b>	0.125 µm	0.125 µm	0.125 µm	1.0 µm	4.0 µm
<b>Standoff distance<sup>3</sup></b>	17 mm	17 mm	17 mm	31.5 mm	50 mm
<b>Triangulation angle</b>	70°	70°	70°	35°	35°
<b>Spot size (nominal)</b>	7x12 µm	16x23 µm	13x20 µm	32x48 µm	60x85 mm

#### Footnotes

<sup>1</sup>Capture range is surface dependent.

<sup>2</sup>Accuracy on horizontal specular surfaces within the measuring range.

<sup>3</sup>Standoff distance is the distance in Z from the lowest point on the DRS laser to the middle of the capture range.



#### Safety Considerations

This system is classified as a Class II laser device by IEC 825 (2001). **Do not stare directly into the laser source.**



World Headquarters: Rochester, NY, USA • 585.544.0400 • [www.ogpnet.com](http://www.ogpnet.com)  
 OGP Shanghai Co, Ltd: Shanghai, China • 86.21.5045.8383/8989 • [www.smartscope.com.cn](http://www.smartscope.com.cn)  
 OGP Messtechnik GmbH: Hofheim-Wallau, Germany • 49.6122.9968.0 • [www.ogpmesstechnik.de](http://www.ogpmesstechnik.de)  
 Optical Gaging (S) Pte Ltd: Singapore • 65.6741.8880 • [www.smartscope.com.sg](http://www.smartscope.com.sg)

