



**SprintMVP™ 200 | 250 | 300**

SprintMVP benchtop systems offer fully automatic measurement with high performance and affordability. Three benchtop SprintMVP models are available to suit your measurement needs.

- Granite base and column for stability with precision CNC X, Y and Z stages
- 3-axis joystick and CNC motion control
- Motorized zoom lens optics with high resolution digital color camera
- Optional 250 mm extended Z axis

SprintMVP Measuring Ranges (mm)				
Models		X	Y	Z
	<b>200</b>	200	150	150
	<b>250</b>	300	150	150
	<b>300</b>	300	300	150


## Automatic Benchtop Measuring Machines




SprintMVP 250 model shown

## Measurement Software

Measure-X® is the world's most popular metrology software. Measure-X makes it easy for QVI SprintMVP to accurately measure fine features that require multi-step measurement routines, automatically combining autofocus, edge detection, programmable lighting, laser scanning and touch probing.

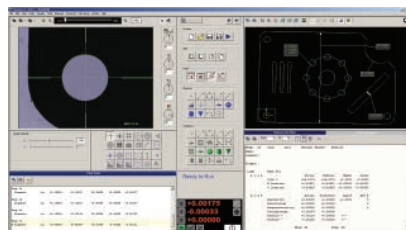

# SprintMVP™ 200 | 250 | 300

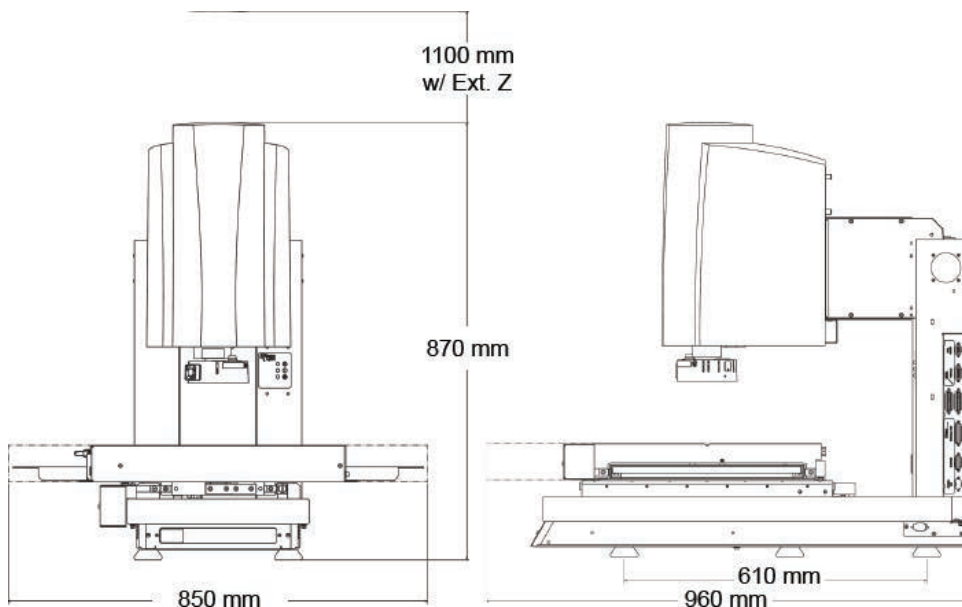

SprintMVP 300 Model Shown

System Weight:  
200 Model - 130 kg  
250 Model - 130 kg  
300 Model - 180 kg

		Standard	Optional
X, Y, Z Travel	200	200 x 150 x 150 mm	250 mm Extended Z Axis
	250	300 x 150 x 150 mm	250 mm Extended Z Axis
	300	300 x 300 x 150 mm	250 mm Extended Z Axis
X, Y, Z Scale Resolution		0.5 µm	0.1 µm
Stage Drive System		Precision, motorized compound XY stage and linear Z stage with 3-axis joystick control	
Max Recommended Stage Load		200, 250 Models - 20 kg 300 Model - 25 kg	
Working Distance		62 mm (with standard VectorLight™)	
Imaging Optics		6.5:1, 10 position motorized zoom lens	
Lens Attachments		0.5X, 0.75X, 1.5X, 2.0X	
Field of View <small>*Highest available magnification</small>	Low Mag	High Mag*	
	9.1 mm diagonal	0.6 mm diagonal	
Metrology Camera		QVI Digital, Megapixel Color Metrology Camera	
Magnification on 24" LCD Monitor		24x to 370x on-screen digital/optical magnification standard with full feature Measure-X layout	12x to 740x on-screen digital/optical magnification with optional add-on lenses and dual monitor user interface
Illumination		LED VectorLight™ SP programmable ring light with 6 rings and 7 sectors, LED backlight, LED square-on surface light	LED VectorLight™ SF programmable ring light with 6 rings and 8 sectors and LED square-on surface light (reduced working clearance)
Sensor Options		Renishaw touch probe and change rack, QVI DRS™ laser	
Controller <small>*Controller configuration subject to change without notice.</small>		QVI standard system controller with networking and communication ports*	Single flat panel LCD monitor, or dual flat panel LCD monitors; keyboard, mouse
Software		Measure-X	MeasureFit®, SmartReport®, CAD interface, SmartFeature® software for FDA compliant environments
Miscellaneous Options		Manual or motorized rotary indexer, NIST traceable calibration artifact, dust cover	
Rated Environment		Temperature: 18-22 °C, stable to ±1 °C; Relative Humidity: 30-80%; Vibration: <0.001g below 15 Hz	
Power		100-120 VAC or 200-240 VAC, 50/60 Hz, 1 phase, 500W	
XY Area Accuracy		E <sub>z</sub> : (2.5 + 4L/1000) µm <sup>1,2,3,4,5,6,7</sup> (200 Model) E <sub>z</sub> : (2.5 + 6L/1000) µm <sup>1,2,3,4,5,6,7</sup> (250, 300 Models)	
Z Linear Accuracy		E <sub>z</sub> : (5.0 + 8L/1000) µm <sup>1,2,4,5,6,7</sup> (with standard optics) (All Models)	E <sub>z</sub> : (4.0 + 8L/1000) µm <sup>1,2,4,5,6,7</sup> (with 2.0X lens attachment)

1. Where L = length in mm. 2. With evenly distributed load up to 5 kg. Depending on load distribution, accuracy at maximum rated load may be less than standard accuracy. 3. Measured in the standard measuring plane. The standard measuring plane is defined as a plane that is within 25 mm of the worktable surface. 4. All optical accuracy specifications at maximum optical magnification at 1:1 digital pixel resolution. 5. All specifications apply to a thermally stable system operated in the rated environment. 6. Maximum rate of temperature change 1 °C/hour. 7. E<sub>z</sub>, Z axis linear and E<sub>z</sub>, XY area accuracy standards are described in QVI Publication Number 790762.



World Headquarters: Rochester, NY, USA • 585.544.0400 • www.ogpnet.com

OGP Shanghai Co, Ltd: Shanghai, China  
86.21.5045.8383/8989 • www.smartscope.com.cn

OGP Messtechnik GmbH: Hofheim-Wallau, Germany  
49.6122.9968.0 • www.ogpmesstechnik.de

Optical Gaging (S) Pte Ltd: Singapore • 65.6741.8880 • www.smartscope.com.sg